

LED 燈具

嵌燈



3寸



產品型號	適用電壓	色溫	流明 (lm)	消耗功率	燈罩型式	外觀尺寸 (mm)	開孔尺寸 (mm)
YS-37I57	AC 100~240V 50/60Hz	5700K	660	7W	平面	Ø110xH 66	Ø80
YS-37I30	AC 100~240V 50/60Hz	3000K	600	7W	平面	Ø110xH 66	Ø80

4寸



產品型號	適用電壓	色溫	流明 (lm)	消耗功率	燈罩型式	外觀尺寸 (mm)	開孔尺寸 (mm)
YS-414I57	AC 100~240V 50/60Hz	5700K	1300	14W	平面	Ø140xH45	Ø120
YS-414I40	AC 100~240V 50/60Hz	4000K	1250	14W	平面	Ø140xH45	Ø120
YS-414I30	AC 100~240V 50/60Hz	3000K	1200	14W	平面	Ø140xH45	Ø120

LED 燈具

嵌燈




5
寸



凸面



弧面

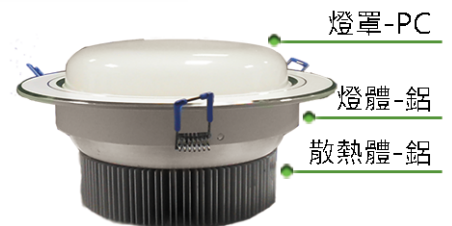

產品型號	適用電壓	色溫	流明 (lm)	消耗功率	燈罩型式	外觀尺寸 (mm)	開孔尺寸 (mm)
YS-514I57	AC 100~240V 50/60Hz	5700K	1300	14W	弧面	Ø182xH 80	Ø150
YS-514I40	AC 100~240V 50/60Hz	4000K	1250	14W	弧面	Ø182xH 80	Ø150
YS-514I30	AC 100~240V 50/60Hz	3000K	1200	14W	弧面	Ø182xH 80	Ø150
YS-514IC57	AC 100~240V 50/60Hz	5700K	1300	14W	凸面	Ø182xH 85	Ø150
YS-514IC40	AC 100~240V 50/60Hz	4000K	1250	14W	凸面	Ø182xH 85	Ø150
YS-514IC30	AC 100~240V 50/60Hz	3000K	1200	14W	凸面	Ø182xH 85	Ø150
YS-520I57	AC 100~240V 50/60Hz	5700K	1900	20W	弧面	Ø182xH 80	Ø150
YS-520I40	AC 100~240V 50/60Hz	4000K	1800	20W	弧面	Ø182xH 80	Ø150
YS-520I30	AC 100~240V 50/60Hz	3000K	1700	20W	弧面	Ø182xH 80	Ø150
YS-520IC57	AC 100~240V 50/60Hz	5700K	1900	20W	凸面	Ø182xH 85	Ø150
YS-520IC40	AC 100~240V 50/60Hz	4000K	1800	20W	凸面	Ø182xH 85	Ø150
YS-520IC30	AC 100~240V 50/60Hz	3000K	1700	20W	凸面	Ø182xH 85	Ø150

LED 燈具

嵌燈




8寸



凸面



弧面

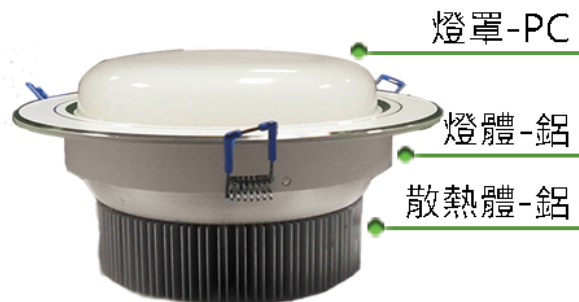

產品型號	適用電壓	色溫	流明 (lm)	消耗功率	燈罩型式	外觀尺寸 (mm)	開孔尺寸 (mm)
YS-820I57	AC 100~240V 50/60Hz	5700K	1900	20W	弧面	Ø232xH 90	Ø205
YS-820I40	AC 100~240V 50/60Hz	4000K	1800	20W	弧面	Ø232xH 90	Ø205
YS-820I30	AC 100~240V 50/60Hz	3000K	1700	20W	弧面	Ø232xH 90	Ø205
YS-820IC57	AC 100~240V 50/60Hz	5700K	1900	20W	凸面	Ø232xH 105	Ø205
YS-820IC40	AC 100~240V 50/60Hz	4000K	1800	20W	凸面	Ø232xH 105	Ø205
YS-820IC30	AC 100~240V 50/60Hz	3000K	1700	20W	凸面	Ø232xH 105	Ø205