




## 走道燈燈具

底座:磨光鋼板白色烤漆



塑膠罩



產品型號	適用電壓	燈管型式	演色性 (Ra)	色溫	流明 (lm)	消耗功率	外觀尺寸 (mm)		
							長	寬	高
YS-141O	AC 100~240V 50/60Hz	T5 2 尺螢光燈管	85	6500K 3000K	1200 x 1 1200 x 1	14W x 1	655	140	95
YS-142O	AC 100~240V 50/60Hz	T5 2 尺螢光燈管	85	6500K 3000K	1200 x 2 1200 x 2	14W x 2	660	220	95
YS-T8101O57	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	5700K	950 x 1	10W x 1	655	140	95
YS-T8101O40	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	4000K	900 x 1	10W x 1	655	140	95
YS-T8101O30	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	3000K	900 x 1	10W x 1	655	140	95
YS-T8102O57	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	5700K	950 x 2	10W x 2	660	220	95
YS-T8102O40	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	4000K	900 x 2	10W x 2	660	220	95
YS-T8102O30	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	3000K	900 x 2	10W x 2	660	220	95

## 嵌 入 型 輕 鋼 架 (T-Bar)

磨光鋼板白色烤漆



鏡面鋁格柵板



產品型號	適用電壓	燈管型式	演色性 (Ra)	色溫	流明 (lm)	消耗功率	外觀尺寸 (mm)		
							長	寬	高
YS-143T	AC 100~240V 50/60Hz	T5 2 尺螢光燈管	85	6500K 3000K	1200 x 3 1200 x 3	14W x 3	600	600	45
YS-144T	AC 100~240V 50/60Hz	T5 2 尺螢光燈管	85	6500K 3000K	1200 x 4 1200 x 4	14W x 4	600	600	45
YS-T8104T57	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	5700K	950 x 4	10W x 4	600	600	60
YS-T8104T40	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	4000K	900 x 4	10W x 4	600	600	60
YS-T8104T30	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	3000K	900 x 4	10W x 4	600	600	60



# 山型燈具

磨光鋼板白色烤漆



產品型號	適用電壓	燈管型式	演色性 (Ra)	色溫	流明 (lm)	消耗功率	外觀尺寸 (mm)		
							長	寬	高
YS-141M	AC 100~240V 50/60Hz	T5 2 尺螢光燈管	85	6500K 3000K	1200 x 1 1200 x 1	14W x 1	590	115	42
YS-142M	AC 100~240V 50/60Hz	T5 2 尺螢光燈管	85	6500K 3000K	1200 x 2 1200 x 2	14W x 2	590	115	42
YS-281M	AC 100~240V 50/60Hz	T5 4 尺螢光燈管	80	6500K 3000K	2700 x 1 2600 x 1	28W x 1	1190	115	42
YS-282M	AC 100~240V 50/60Hz	T5 4 尺螢光燈管	80	6500K 3000K	2700 x 2 2600 x 2	28W x 2	1190	115	42
YS-T8101M57	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	5700K	950 x 1	10W x 1	623	128	88
YS-T8101M40	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	4000K	900 x 1	10W x 1	623	128	88
YS-T8101M30	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	3000K	900 x 1	10W x 1	623	128	88
YS-T8102M57	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	5700K	950 x 2	10W x 2	623	157	65
YS-T8102M40	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	4000K	900 x 2	10W x 2	623	157	65
YS-T8102M30	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	3000K	900 x 2	10W x 2	623	157	65
YS-T8201M57	AC 100~240V 50/60Hz	T8 LED 4 尺燈管	>90	5700K	1900 x 1	20W x 1	1250	128	88
YS-T8201M40	AC 100~240V 50/60Hz	T8 LED 4 尺燈管	>90	4000K	1800 x 1	20W x 1	1250	128	88
YS-T8201M30	AC 100~240V 50/60Hz	T8 LED 4 尺燈管	>90	3000K	1800 x 1	20W x 1	1250	128	88
YS-T8202M57	AC 100~240V 50/60Hz	T8 LED 4 尺燈管	>90	5700K	1900 x 2	20W x 2	1250	157	65
YS-T8202M40	AC 100~240V 50/60Hz	T8 LED 4 尺燈管	>90	4000K	1800 x 2	20W x 2	1250	157	65
YS-T8202M30	AC 100~240V 50/60Hz	T8 LED 4 尺燈管	>90	3000K	1800 x 2	20W x 2	1250	157	65



# 工字(工事)型燈具

磨光鋼板白色烤漆



T5燈具:鏡面鋁反光片  
T8燈具:烤漆反射片




產品型號	適用電壓	燈管型式	演色性 (Ra)	色溫	流明 (lm)	消耗功率	外觀尺寸 (mm)		
							長	寬	高
YS-141W	AC 100~240V 50/60Hz	T5 2 尺螢光燈管	85	6500K 3000K	1200 x 1 1200 x 1	14W x 1	578	100	52
YS-142W	AC 100~240V 50/60Hz	T5 2 尺螢光燈管	85	6500K 3000K	1200 x 2 1200 x 2	14W x 2	578	150	65
YS-281W	AC 100~240V 50/60Hz	T5 4 尺螢光燈管	80	6500K 3000K	2700 x 1 2600 x 1	28W x 1	1178	100	52
YS-282W	AC 100~240V 50/60Hz	T5 4 尺螢光燈管	80	6500K 3000K	2700 x 2 2600 x 2	28W x 2	1178	150	65
YS-T8101W57	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	5700K	950 x 1	10W x 1	615	140	72
YS-T8101W40	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	4000K	900 x 1	10W x 1	615	140	72
YS-T8101W30	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	3000K	900 x 1	10W x 1	615	140	72
YS-T8102W57	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	5700K	950 x 2	10W x 2	615	170	85
YS-T8102W40	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	4000K	900 x 2	10W x 2	615	170	85
YS-T8102W30	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	3000K	900 x 2	10W x 2	615	170	85
YS-T8201W57	AC 100~240V 50/60Hz	T8 LED 4 尺燈管	>90	5700K	1900 x 1	20W x 1	1235	140	72
YS-T8201W40	AC 100~240V 50/60Hz	T8 LED 4 尺燈管	>90	4000K	1800 x 1	20W x 1	1235	140	72
YS-T8201W30	AC 100~240V 50/60Hz	T8 LED 4 尺燈管	>90	3000K	1800 x 1	20W x 1	1235	140	72
YS-T8202W57	AC 100~240V 50/60Hz	T8 LED 4 尺燈管	>90	5700K	1900 x 2	20W x 2	1235	170	85
YS-T8202W40	AC 100~240V 50/60Hz	T8 LED 4 尺燈管	>90	4000K	1800 x 2	20W x 2	1235	170	85
YS-T8202W30	AC 100~240V 50/60Hz	T8 LED 4 尺燈管	>90	3000K	1800 x 2	20W x 2	1235	170	85

T5 螢光燈管相關資訊，以供應商公告為主



# 防水燈燈具

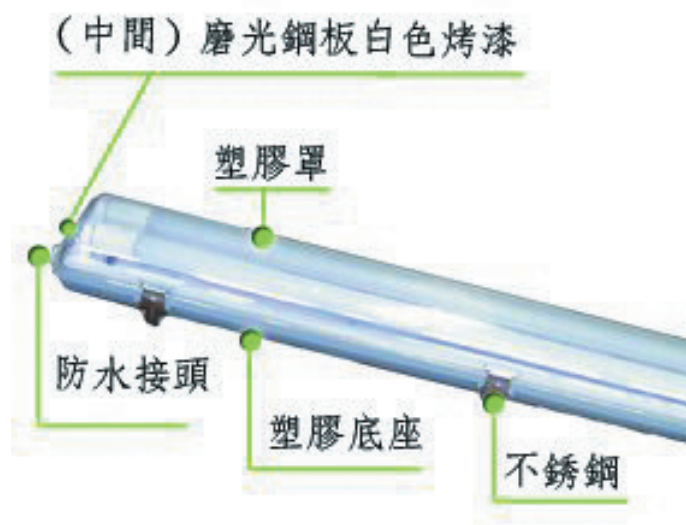

產品型號	適用電壓	燈管型式	演色性 (Ra)	色溫	流明 (lm)	消耗功率	外觀尺寸 (mm)		
							長	寬	高
YS-141WP	AC 100~240V 50/60Hz	T5 2 尺螢光燈管	85	6500K 3000K	1200 x 1 1200 x 1	14W x 1	655	74	89
YS-142WP	AC 100~240V 50/60Hz	T5 2 尺螢光燈管	85	6500K 3000K	1200 x 2 1200 x 2	14W x 2	655	130	100
YS-281WP	AC 100~240V 50/60Hz	T5 4 尺螢光燈管	80	6500K 3000K	2700 x 1 2600 x 1	28W x 1	1265	74	89
YS-282WP	AC 100~240V 50/60Hz	T5 4 尺螢光燈管	80	6500K 3000K	2700 x 2 2600 x 2	28W x 2	1265	130	100
YS-T8101WP57	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	5700K	950 x 1	10W x 1	655	74	89
YS-T8101WP40	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	4000K	900 x 1	10W x 1	655	74	89
YS-T8101WP30	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	3000K	900 x 1	10W x 1	655	74	89
YS-T8102WP57	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	5700K	950 x 2	10W x 2	655	130	100
YS-T8102WP40	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	4000K	900 x 2	10W x 2	655	130	100
YS-T8102WP30	AC 100~240V 50/60Hz	T8 LED 2 尺燈管	>90	3000K	900 x 2	10W x 2	655	130	100
YS-T8201WP57	AC 100~240V 50/60Hz	T8 LED 4 尺燈管	>90	5700K	1900 x 1	20W x 1	1265	74	89
YS-T8201WP40	AC 100~240V 50/60Hz	T8 LED 4 尺燈管	>90	4000K	1800 x 1	20W x 1	1265	74	89
YS-T8201WP30	AC 100~240V 50/60Hz	T8 LED 4 尺燈管	>90	3000K	1800 x 1	20W x 1	1265	74	89
YS-T8202WP57	AC 100~240V 50/60Hz	T8 LED 4 尺燈管	>90	5700K	1900 x 2	20W x 2	1265	130	100
YS-T8202WP40	AC 100~240V 50/60Hz	T8 LED 4 尺燈管	>90	4000K	1800 x 2	20W x 2	1265	130	100
YS-T8202WP30	AC 100~240V 50/60Hz	T8 LED 4 尺燈管	>90	3000K	1800 x 2	20W x 2	1265	130	100